


# DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

## BASIC INFORMATION:

### 1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

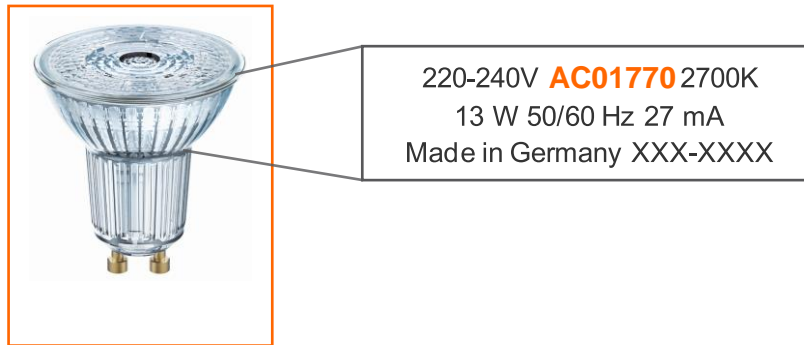

### 2. HOW CAN I READ THE FOLLOWING CHARTS?

**Legend:**  
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions

Legend					PARATHOM PRO PAR16							
<span style="background-color: #90EE90; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	Good dimmability with indicated number of lamps (dimming range greater than 75%)	<span style="background-color: #FFFF00; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	Limited dimmability with indicated number of lamps (dimming range smaller than 75%)	<span style="background-color: #FF0000; border: 1px solid black; display: inline-block; width: 20px; height: 10px;"></span>	Undesired dimmability	Not tested						
					50 36°	80 36°	80 36°	80 60°				
					EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code				
					4058075448728 / AC24597	4058075449107 / AC24600	4058075449282 / AC24603	4058075449220 / AC24606				
					4058075448704 / AC24598	4058075449084 / AC24601	4058075449268 / AC24604	4058075449193 / AC24608				
					4058075448681 / AC24599	4058075449060 / AC24602	4058075449244 / AC24605	4058075449206 / AC24607				
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type								
ABB	STD 50-3	230/50Hz	60-500	L	58-0%	57-0%	86-0%	74-0%	85-0%	87-0%	85-0%	87-0%
Altenburger	50,3	230/50Hz			93-0%	92-0%	93-0%	92-0%	92-0%	92-0%	92-0%	92-0%
AURORA	DSP 400	230/50Hz	400	L	90-0%	89-0%	90-0%	89-0%	89-0%	89-0%	89-0%	89-0%
Berker	2861	230/50Hz	50-420	U	89-0%	88-0%	89-0%	88-0%	88-0%	88-0%	88-0%	88-0%
Bticino	L/N/NT4411N	230/50Hz			94-0%	93-0%	94-0%	93-0%	93-0%	92-0%	93-0%	92-0%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	95-2%	93-0%						
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	95-3%	93-3%	95-3%	93-3%	94-3%	93-3%	94-3%	93-3%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	50-1%	87-1%	93-1%	87-1%	90-1%	87-1%	90-1%	87-1%
Busch-Jaeger	6526 U	230/50Hz			94-40%	93-2%						
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	91-0%	90-0%	91-0%	90-0%	90-0%	90-0%	90-0%	90-0%
DimMax	420SL	230/50Hz	200	L/T	93-0%	91-0%	93-0%	91-0%	92-0%	91-0%	92-0%	91-0%
DINUY	RE EL1 LE1	230/50Hz	400	LED	92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	400GLU	230/50Hz			94-3%	91-0%	94-3%	91-0%	92-3%	90-0%	92-3%	90-0%
ELKO	315GLE	230/50Hz	20-315	T	92-3%	90-0%	92-3%	90-0%	91-3%	90-0%	91-3%	90-0%
ELKO	600GLE/I	230/50Hz			92-0%	91-0%	92-0%	91-0%	91-0%	91-0%	91-0%	91-0%
ELKO	600GLU	230/50Hz	40-600	U	92-2%	91-2%	92-2%	91-2%	91-2%	91-2%	91-2%	91-2%

Information about the lamp type


Assessment of the results into categories. Includes the number of lamps and the related dimming range

# DIMMER KOMPATIBILITÄT LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

## BASISINFORMATIONEN:

### 1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.

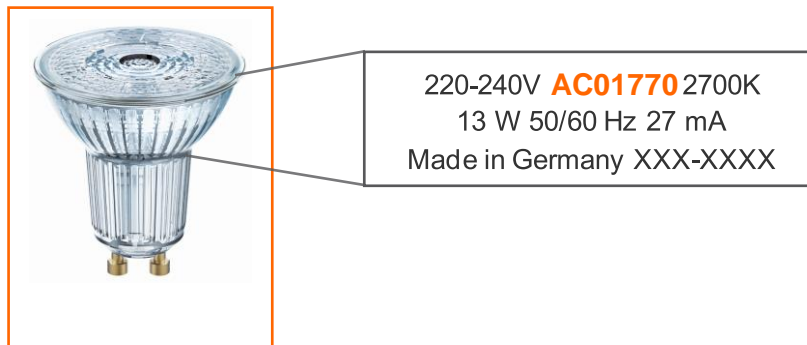

### 2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.









Liste der getesteten Dimmer

Legend						PARATHOM PRO PAR16 50 36°	PARATHOM PRO PAR16 80 36°	PARATHOM DIM PAR16 80 36°	PARATHOM DIM PAR16 80 60°
Good dimmability with indicated number of lamps (dimming range greater than 75%)									
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)									
Undesired dimmability									
Not tested									
Dimmer						EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code
Brand	Model	Voltage	Power	Type		4058075448728 / AC24597	40580754449107 / AC24600	4058075449282 / AC24603	4058075449220 / AC24608
ABB	STD 50-3	230/50Hz	60-500	L	Dimming range 1 Lamp	4058075448704 / AC24598	4058075449094 / AC24601	4058075449268 / AC24604	4058075449183 / AC24608
Altenburger	50_3	230/50Hz			4058075448681 / AC24599	4058075449060 / AC24602	4058075449244 / AC24605	4058075449206 / AC24607	
AURORA	DSP 400	230/50Hz	400	L	Dimming range 4 Lamps				
Berker	2861	230/50Hz	50-420	U	Dimming range 1 Lamp				
Bticino	L/N/NT4411N	230/50Hz			Dimming range 4 Lamps				
Busch-Jaeger	6513 U-102	230/50Hz	420	T	Dimming range 1 Lamp				
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	Dimming range 4 Lamps				
Busch-Jaeger	2250 U	230/50Hz	60-600	L	Dimming range 1 Lamp				
Busch-Jaeger	6526 U	230/50Hz			Dimming range 4 Lamps				
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	Dimming range 1 Lamp				
DimMax	420SL	230/50Hz	200	L/T	Dimming range 4 Lamps				
DINUY	RE ELI LE1	230/50Hz	400	LED	Dimming range 1 Lamp				
ELKO	400GLI	230/50Hz			Dimming range 4 Lamps				
ELKO	315GLE	230/50Hz	20-315	T	Dimming range 1 Lamp				
ELKO	600GLE/I	230/50Hz			Dimming range 4 Lamps				
ELKO	600GLI	230/50Hz	40-600	U	Dimming range 1 Lamp				

Angaben zum Lampentyp









Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

## DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					PARATHOM DIM LINE 78		PARATHOM DIM LINE 78		PARATHOM DIM LINE118		PARATHOM DIM LINE118		PARATHOM DIM PIN G9		PARATHOM DIM PIN G9		PARATHOM DIM PIN G4		LED PIN DIM GY6.35	
					75		100		125		150		32		40		20			
Good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code		EAN/ Basic Code	
Undesired dimmability																				
Not tested																				
Dimmer					4058075811874 / AC11919		4058075169050 / AC11780		4058075811850 / AC11924		4058075271999 / AC18433		4058075811553 / AC02801		4058075271791 / AC17654		4058075271746 / AC17652		4058075432185 / AC24750	
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
ABB	STD 50-3	230/50Hz	60-500	L	96-16%	98-18%	90-10%	92-24%	100-26%	100-29%	99-10%	99-9%	90-1%	100-0%	99-2%	99-2%	100-0%	100-0%	67-0%	99-0%
Altenburger	50,3	230/50Hz			99-31%						99-14%	98-4%	100-14%	98-38%	91-2%	98-0%		100-0%	99-6%	99-23%
AURORA	DSP 400	230/50Hz	400	L	97-0%	97-0%					99-0%	99-0%			96-0%	99-0%	100-0%	60-0%		
Berker	2861	230/50Hz	50-420	U	98-31%	98-29%	88-31%	95-31%	100-40%	100-43%	99-18%	99-11%		100-9%	99-0%	99-2%	75-0%	100-9%	99-0%	99-10%
Bticino	L/N/NT4411N	230/50Hz			98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Bticino	L/N/NT4408	230/50Hz			97-0%	97-0%							100-4%	91-4%						
bticino	NT4402N	230/50Hz	500	R							98-3%	99-0%	100-5%	100-5%			98-3%		74-0%	98-32%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	99-16%	99-9%	95-25%	95-21%	99-27%	99-21%	99-19%	99-9%	100-0%	100-0%	98-25%	98-15%		100-21%	99-44%	99-25%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	99-23%	99-25%	83-26%	85-28%	100-9%	100-44%	98-5%	100-2%	72-1%	93-1%		76-0%	100-0%	100-0%	100-0%	99-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	98-13%	98-13%		94-17%	100-15%	100-17%		99-0%			54-0%	80-16%	100-0%	83-0%	99-0%	
Busch-Jaeger	6526 U	230/50Hz			99-34%	98-33%	84-30%	85-30%	100-42%	100-44%	99-5%	98-3%	100-19%	100-16%	99-0%	98-0%	100-0%		99-0%	99-5%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	96-6%	97-9%	91-8%	92-11%	100-4%	100-6%	99-1%	99-0%	90-6%	99-6%		94-0%	99-1%	100-0%	92-0%	99-0%
DimMax	420 SL	230/50Hz	200	L/T							99-0%	100-0%			99-0%	98-0%	89-0%	100-0%	99-0%	99-4%
DINUY	RE EL1 LE1	230/50Hz	400	LED	97-41%	97-40%	95-3%	100-3%	100-0%	100-3%	99-0%	99-0%	100-7%	100-18%	94-0%	94-0%	99-0%	100-0%	99-0%	99-0%
ELKO	400GLI	230/50Hz			99-0%	99-0%			100-0%	100-0%	99-0%	99-0%			86-0%	51-0%	87-0%	61-0%		
ELKO	315GLE	230/50Hz	20-315	T	98-28%	98-10%	92-25%	92-24%	99-34%	100-32%	99-0%	99-0%		100-13%	70-1%	80-0%		100-0%	99-0%	100-13%
ELKO	600GLE/l	230/50Hz			98-0%	98-0%	85-2%	87-4%	100-0%	100-0%	99-14%	99-7%	95-2%	99-2%		83-1%	78-0%	100-16%		
ELKO	600GLI	230/50Hz	40-600	U	98-14%	98-14%	86-17%	88-22%	100-16%	100-23%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
ELKO	420GLE/l	230/50Hz	40-420	U	98-5%	98-6%	84-3%	85-5%	100-4%	100-3%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
ELKO	1000LRI	230/50Hz			97-0%	97-0%	98-0%	98-0%	100-0%	100-0%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%	100-0%	100-0%	99-0%	99-0%
ELKO	630GLE	230/50Hz	20-630	U	99-13%	98-11%	92-14%	92-13%	100-17%	100-14%	99-14%	99-7%	100-2%	100-4%		83-1%	78-0%	100-16%		
Eltako	EUD61NPN-UC	230/50Hz	5-400	R/L/C	97-2%	97-3%			100-0%	100-0%	99-0%	99-0%	100-2%	100-12%	99-0%	98-0%	99-0%	100-0%		
Feller	40200.LEDxxx	230/50Hz			98-27%	98-7%	90-23%	90-23%	100-32%	100-29%	99-1%	100-0%	100-19%	100-9%		90-0%			99-0%	99-0%
Feller	40600 RLC	230/50Hz	20-600	U	98-0%	98-0%	85-2%	87-4%	100-0%	100-0%	99-1%	100-0%	95-2%	99-2%		90-0%			99-0%	99-0%
Feller	40600.RC	230/50Hz			99-13%	98-11%	92-14%	92-13%	100-17%	100-14%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%	75-0%	100-9%	98-0%	98-0%
Feller	40600.RL	230/50Hz			98-14%	98-14%	86-17%	88-22%	100-16%	100-23%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
Feller	40420.RLC	230/50Hz			98-5%	98-6%	84-3%	85-5%	100-4%	100-3%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
Feller	31000	230/50Hz			97-0%	97-0%	98-0%	98-0%	100-0%	100-0%	100-0%	100-0%	94-9%	94-9%	97-0%	98-0%	100-0%			
Gira	226200	230/50Hz			0-98%						99-0%	99-0%		100-1%		82-1%		100-0%	85-0%	99-0%
Gira	030700	230/50Hz	20-525	T	99-16%	99-19%	92-22%	92-23%	98-26%	100-28%	99-16%	99-7%	100-2%	100-2%	100-10%	98-1%		100-0%	99-9%	100-24%









\*G4 and GY6.35 versions tested with HTM 70 transformer

## DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

																				
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code								
					4058075811874 / AC11919	4058075169050 / AC11780	4058075811850 / AC11924	4058075271999 / AC18433	4058075811553 / AC02801	4058075271791 / AC17654	4058075271746 / AC17652	4058075432185 / AC24750								
					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																				
Undesired dimmability																				
Not tested																				
Dimmer																				
Gira	117600	230/50Hz	50-420	U	98-31%	98-33%	89-31%	95-29%	100-44%	100-41%	99-19%	99-12%	100-19%	100-11%	99-4%	99-2%	100-31%	99-0%	99-16%	
Gira	238500	230/50Hz			100-0%	98-0%	94-13%	94-13%	100-13%	100-10%	100-8%	99-0%	100-20%	100-8%	99-0%	99-0%	100-0%	100-0%	100-0%	99-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	97-16%	97-14%	98-19%	98-16%	100-23%	100-19%	100-1%	98-0%	100-4%	100-6%	98-1%	99-0%	100-1%	100-0%	100-0%	100-0%
Hager	WUD87	230/50Hz	400	LED-U	99-19%	99-19%	89-20%	94-18%	100-27%	100-22%	100-1%	99-0%	100-13%	100-13%	81-0%	99-1%	73-0%	100-14%	99-0%	99-7%
Hamilton	KP1X40	230/50Hz	400									98-42%		92-9%			100-0%			
Hugo Müller	paladin 872110 led	230/50Hz			97-41%	97-40%	95-3%	100-3%	100-0%	100-3%	99-42%	99-41%	100-7%	100-18%		98-34%	99-42%	100-0%		
Jung	225 NVDE	230/50Hz	20-500	L	98-0%						99-0%	99-0%		100-1%		82-1%		100-0%	85-0%	99-0%
Jung	225 TDE	230/50Hz			99-16%	99-19%	92-22%	92-23%	98-26%	100-28%	99-16%	99-7%	100-2%	100-2%	100-10%	98-1%		100-0%	99-9%	100-24%
Jung	254 UDIE1	230/50Hz			98-31%	98-33%	89-31%	95-29%	100-44%	100-41%	99-9%	100-3%	100-19%	100-11%	99-0%	98-0%		100-0%	99-0%	99-0%
Jung	1224 LEDUDE	230/50Hz		LED	100-0%	98-0%	94-13%	94-13%	100-13%	100-10%	100-8%	99-0%	100-20%	100-8%	99-0%	99-0%		100-0%	100-0%	99-0%
Jung	3904 REGHE	230/50Hz			97-16%	97-14%	98-19%	98-16%	100-23%	100-19%	100-0%	99-0%	100-4%	100-6%	98-12%	98-0%	100-0%	100-13%		
Legrand	665114	230/50Hz	400	U	98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	574319/574339	230/50Hz	400	U	98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	572239/572739	230/50Hz	400	U	98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	078407/079207	230/50Hz	400	U	98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	048869/048871	230/50Hz	400	U	98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	067083/048869	230/50Hz			98-6%	98-8%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Legrand	770061	230/50Hz	400	RL		98-12%	90-12%	92-14%	100-19%	100-20%			98-1%	99-5%			59-0%			
Legrand	099314	230/50Hz	300	RL	99-0%	99-0%	90-11%	91-11%			99-0%	98-0%	99-14%	99-3%	99-0%	98-0%		100-0%		
Legrand	770062	230/50Hz	400	RLC	97-0%	97-0%	95-14%	95-14%	99-17%	99-17%	99-3%	99-0%	100-1%	99-9%	99-0%	98-0%		100-0%		
Legrand	078405	230/50Hz	600	RL	97-0%	97-0%					99-1%	99-0%	100-4%	91-4%		94-0%	99-1%	100-0%	92-0%	99-0%
Legrand	066721	230/50Hz	3-75	L															99-0%	99-0%
Legrand	752162		5-60W	T															77-0%	99-0%
MASTER	DM-DGL	230/50Hz	1000	U / LED	97-2%	97-2%	99-42%	100-42%			99-40%	99-39%	100-4%	100-12%	91-39%	91-0%	99-40%			
MASTER	DM-2500	230/50Hz	2500	U / LED	97-2%	97-2%	99-0%	100-0%	100-0%	100-0%	99-0%	99-0%	100-8%	100-14%	94-0%	94-0%	99-0%	100-0%		
Merten	MEG5136-0000	230/50Hz			98-28%	98-10%	92-25%	92-24%	99-34%	100-32%	99-0%	99-0%		100-13%	70-1%	80-0%		100-0%	99-0%	100-13%
Merten	MEG5134-0000	230/50Hz			98-27%	98-7%	90-23%	90-23%	100-32%	100-29%	99-9%	100-3%	100-19%	100-9%	99-0%	98-0%		100-0%	99-0%	99-0%
Merten	MEG5139-0000	230/50Hz			98-0%	98-0%	85-2%	87-4%	100-0%	100-0%	99-14%	99-7%	95-2%	99-2%	83-1%	78-0%		100-16%		
Merten	MEG5137-0000	230/50Hz			99-13%	98-11%	92-14%	92-13%	100-17%	100-14%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%	75-0%	100-9%	98-0%	98-0%
Merten	MEG5133-0000	230/50Hz			98-14%	98-14%	86-17%	88-22%	100-16%	100-23%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
Merten	MEG5138-0000	230/50Hz			98-5%	98-6%	84-3%	85-5%	100-4%	100-3%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
Merten	MEG 5170-0300	230/50Hz	10-200	U	84-0%	75-0%			100-32%	100-30%	76-23%		100-9%	100-12%	69-8%	99-0%	97-0%	100-0%	100-37%	99-28%
Merten	MEG 5131	230/50Hz	40-400	L	98-0%	98-0%	86-0%	87-0%	100-0%	100-0%	99-0%	99-0%	95-5%	100-5%	81-0%	98-0%		100-0%	99-0%	100-0%
Merten	MEG 5132	230/50Hz			98-0%	98-0%	86-0%	87-0%	100-0%	100-0%	99-0%	99-0%	95-5%	100-5%	81-0%	98-0%		100-0%	99-0%	100-0%
Merten	MEG 5140	230/50Hz	9-100	L	97-0%	98-0%	58-0%	84-0%	100-0%	100-0%	99-0%	98-0%	91-6%	98-6%		78-0%	96-0%		57-0%	100-7%
Merten	MEG 5135	230/50Hz	60-1000	L	97-0%	97-0%	98-0%	98-0%	100-0%	100-0%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%	100-0%	100-0%		
MK	K4501	230/50Hz	180	L	96-11%	96-11%	83-15%	84-15%	100-18%	100-19%	98-0%	99-0%	100-7%	92-18%		99-0%	98-0%	100-0%	99-0%	99-0%

\*G4 and GY6.35 versions tested with HTM 70 transformer

## DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					PARATHOM DIM LINE 78 75	PARATHOM DIM LINE 78 100	PARATHOM DIM LINE118 125	PARATHOM DIM LINE118 150	PARATHOM DIM PIN G9 32	PARATHOM DIM PIN G9 40	PARATHOM DIM PIN G4 20	LED PIN DIM GY6.35						
Good dimmability with indicated number of lamps (dimming range greater than 75%)																		
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																		
Undesired dimmability																		
Not tested																		
					EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code	EAN/Basic Code						
					4058075811874 / AC11919	4058075169050 / AC11780	4058075811850 / AC11924	4058075271999 / AC18433	4058075811553 / AC02801	4058075271791 / AC17654	4058075271746 / AC17652	4058075432185 / AC24750						
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps		
Brand	Model	Voltage range	Power	Type														
NEXUS	881P-01	230/50Hz	400	L	97-0%			100-0%	100-0%		99-0%		99-9%		99-0%	100-0%	91-0%	
NIKO	310-01900	230/50Hz	5-200	U	97-6%	97-6%	97-6%	100-6%	100-6%	99-0%	100-0%	100-4%	100-8%	100-0%	99-0%	99-0%	100-0%	100-0%
NIKO	330-00700	230/50Hz	5-200	U	97-9%	97-9%	98-11%	100-11%	100-14%	100-14%	100-5%	100-5%	100-8%	99-0%	99-0%	99-0%	100-0%	99-11%
Odace	S520512	230/50Hz			98-27%	98-7%	90-23%	90-23%	100-32%	100-29%	99-1%	100-0%	100-19%	100-9%			99-0%	99-0%
Odace	S520511	230/50Hz			98-14%	98-14%	86-17%	88-22%	100-16%	100-23%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		99-0%
Odace	S520515	230/50Hz			98-5%	98-6%	84-3%	85-5%	100-4%	100-3%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%
Odace	S520518	230/50Hz			97-0%	98-0%	58-0%	84-0%	100-0%	100-0%	99-0%	98-0%	91-6%	98-6%		78-0%	96-0%	57-0%
Osram	HTi DALI 315 DIM	230/50Hz	20-315	DALI-T	98-12%		97-17%	92-16%	99-17%	100-16%	100-4%	99-0%	94-4%	100-2%	99-0%	99-0%	86-0%	100-6%
PEHA	435 HAN	230/50Hz	60-600	L	98-0%	98-18%	66-12%	84-24%	100-26%	100-29%	99-2%	98-0%		95-26%		51-0%	98-0%	93-0%
Schneider	400GLI	230/50Hz	40-400	T	99-0%	99-0%			100-0%	100-0%	99-0%	99-0%				86-0%	51-0%	87-0%
Schneider	SBD315RC	230/50Hz			98-28%	98-10%	92-25%	92-24%	99-34%	100-32%	99-0%	99-0%		100-13%	70-1%	80-0%		100-0%
Schneider	SBD200LED	230/50Hz	400		98-27%	98-7%	90-23%	90-23%	100-32%	100-29%	99-1%	100-0%	100-19%	100-9%		90-0%		99-0%
Schneider	SBD600RCL	230/50Hz			98-0%	98-0%	85-2%	87-4%	100-0%	100-0%	99-14%	99-7%	95-2%	99-2%		83-1%	78-0%	100-16%
Schneider	SBD630RC	230/50Hz			99-13%	98-11%	92-14%	92-13%	100-17%	100-14%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%	75-0%	100-9%
Schneider	SBD600RL	230/50Hz			98-14%	98-14%	86-17%	88-22%	100-16%	100-23%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		99-0%
Schneider	SBD420RCL	230/50Hz			98-5%	98-6%	84-3%	85-5%	100-4%	100-3%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%
Schneider	5170	230/50Hz			84-0%	75-0%			100-32%	100-30%	76-23%		100-9%	100-12%	69-8%	99-0%	97-0%	100-0%
Schneider	SBD400RL	230/50Hz			98-0%	98-0%	86-0%	87-0%	100-0%	100-0%	99-0%	99-0%	95-5%	100-5%	81-0%	98-0%		100-0%
Schneider	SBD5PL	230/50Hz			97-0%	98-0%	58-0%	84-0%	100-0%	100-0%	99-0%	98-0%	91-6%	98-6%		78-0%	96-0%	
Schneider	ATTD1000RL	230/50Hz			97-0%	97-0%	98-0%	98-0%	100-0%	100-0%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%	100-0%	100-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	98-3%	97-4%	97-14%	97-14%	100-14%	100-14%	99-2%	100-0%	100-9%	100-9%	100-0%	98-0%	99-2%	100-0%
Siemens	5TC8 284	230/50Hz	20-525	T			93-16%	89-11%			99-13%	99-2%	90-1%	64-1%	66-11%	89-1%		100-0%
Siemens	5WG1-527-1AB31	230/50Hz	20-500	KNX-U	97-0%	97-0%	95-29%	95-22%	100-0%	100-16%	100-1%	98-0%	100-2%	100-6%	98-1%	99-0%	100-1%	100-0%
VADSBO	LD 220	230/50Hz	1-200	U	98-0%	97-0%	100-3%	100-3%	100-4%	100-0%	100-0%	99-0%	100-26%	100-26%	98-0%	98-0%	100-0%	100-0%
VARIILIGHT	HQ3W	230/50Hz	400		97-6%	95-6%	94-9%	94-9%	100-12%	100-9%	99-1%	99-0%	87-9%	100-18%	98-0%	86-0%	99-1%	100-0%
VARIILIGHT	JQP401W	230/50Hz	400	T	97-3%	95-9%	77-4%	94-12%	100-6%	100-8%		99-0%	100-30%	98-17%		100-0%		100-0%
Vimar	20135	230/50Hz	3 - 100	U	97-6%	97-3%	91-9%	93-9%	100-9%	100-9%	99-0%	100-0%	100-2%	100-14%	100-0%	98-0%	99-0%	100-0%
ZANO	WH401	230/50Hz	400	L	97-0%	95-0%	78-0%	94-0%	100-0%	100-0%		99-0%			88-0%	97-0%	100-0%	100-0%
ZANO	WH251	230/50Hz	250		97-0%	95-0%	76-0%	94-0%	100-0%	100-0%		99-0%					100-0%	100-0%
ZANO	Z GRID 700	230/50Hz	250	LED					100-0%	100-0%			93-21%	91-21%				63-0%
ZANO	Z GRID 500	230/50Hz	500						100-0%	100-0%		99-0%	71-6%	99-6%	96-0%	89-0%	99-0%	100-0%

\*G4 and GY6.35 versions tested with HTM 70 transformer

**Please note:**

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

**Application Notes:**

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

**LEDVANCE GmbH**

Head Office:

Parkring 29-33  
85748 Garching, Germany  
Phone +49 89 780673-100  
Fax +49 89 780673-XXX  
[www.ledvance.com](http://www.ledvance.com)

**Bitte beachten:**

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

**Anwendungshinweis:**

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.